
New York State Low-Level Radioactive Waste Status Report for 2022

Final Report | July 2023



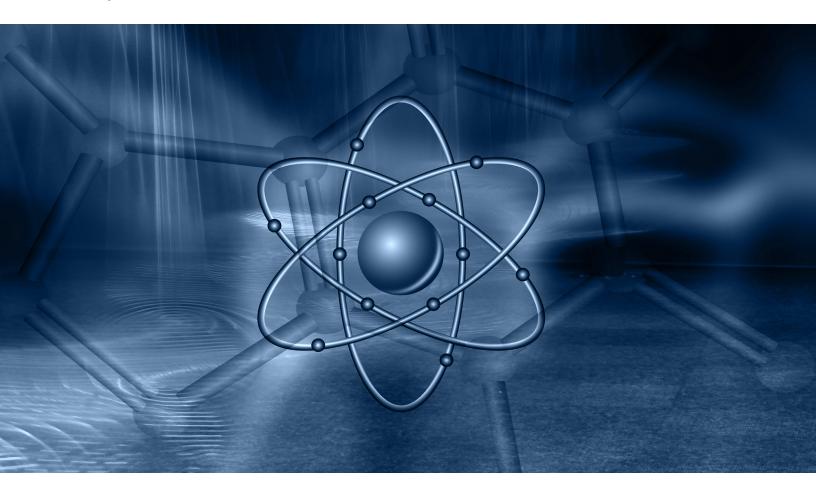

NYSERDA's Promise to New Yorkers:

NYSERDA provides resources, expertise, and objective information so New Yorkers can make confident, informed energy decisions.

Our Vision:

New York is a global climate leader building a healthier future with thriving communities; homes and businesses powered by clean energy; and economic opportunities accessible to all New Yorkers.

Our Mission:

Advance clean energy innovation and investments to combat climate change, improving the health, resiliency, and prosperity of New Yorkers and delivering benefits equitably to all.

New York State Low-Level Radioactive Waste Status Report for 2022

Final Report

New York State Energy Research and Development Authority

Albany, NY

Alyse Peterson Senior Advisor

Kathleen Brust Office Manager

Table of Contents

1	Introdu	ction	1
2	Low-Le	vel Radioactive Waste Disposed by New York State Generators in 2022	3
Tab	le 1	Generators Reporting and Disposing Waste	4
Tab	le 2	Volume and Radioactivity of Waste Disposed	5
Tab	le 3	Waste Disposed by Class and Generator Type	6
Tab	le 4	Distribution of Waste Among Disposal Facilities	7
Tab	le 5	Waste Disposed by County of Origin	8
Tab	le 6	Radionuclide Content of Waste Disposed	10
Tab	le 7	Number of Facilities Disposing Various Waste Types	12
3	Low-Le	vel Radioactive Waste in Storage (as of December 31, 2022)	13
Tab	le 8	Generators Reporting and Storing Waste Pending Disposal	14
Tab	le 9	Volume and Radioactivity of Waste Stored Pending Disposal	15
Tab	le 10	Waste in Storage Pending Disposal by Class and Generator Type	16
Tab	le 11	Number of Facilities Reporting Storage of Various Waste Types Pending Disposa	al17
Tab	le 12	Waste in Storage Pending Disposal by County of Origin	18
Tab	le 13	Radionuclide Content of Waste in Storage Pending Disposal	20
Tab	le 14	Waste Reported in Storage for Decay by Generator Type	22
4	Historic	Data and Projections for Low-Level Radioactive Waste Generation in New York State	23
Tab	le 15	Historic Overview of Waste Disposal by Volume	24
Tab	le 16	Historic Overview of Waste Disposal by Radioactivity	24
Figu	ure 1	Historic Overview of Waste Disposal by Volume	25
Figu	ıre 2	Historic Overview of Waste Disposal by Radioactivity	25
Tab	le 17	Generators' Five-Year Projections of Waste by Volume	26
Tab	le 18	Generators' Five-Year Projections of Waste by Radioactivity	26
Apı	oendix A	a: Conversions for Units	A-1

1 Introduction

This report summarizes data on low-level radioactive waste (LLRW)¹ generated in New York State.² It is based on reports from generators³ that are filed annually with the New York State Energy Research and Development Authority (NYSERDA). The New York State Low-Level Radioactive Waste Management Act⁴ (State Act) requires LLRW generators in the State to submit annual reports to NYSERDA that provide detailed information on waste generated, stored, and disposed. To facilitate compliance, NYSERDA developed report forms available on its website, while generators without internet service are provided paper copies upon request. Generators have submitted such reports to NYSERDA for 37 years..

The State Act requires NYSERDA to prepare an annual report summarizing—by type of generator and county—the nature, characteristics, and quantities of LLRW generated in the State. This report is designed to meet that requirement and summarizes the most recent year's data in a series of tables and figures. Section 2 reports volume, radioactivity,⁵ and other characteristics of waste disposed in 2022. Section 3 summarizes volume, radioactivity, and other characteristics of waste held in storage pending future disposal as of December 31, 2022. Section 3 also summarizes the volume of waste held in storage for decay and subsequent disposal as nonradioactive waste as of December 31, 2022. Such waste may still be subject to special disposal requirements due to other hazardous characteristics (e.g., regulated medical waste). Section 4 shows historical LLRW generation data and includes generators' projections of waste quantities for the next five years.

In this report, volume is presented in cubic meters and radioactivity is presented in gigabecquerels (GBq) or megabecquerels (MBq). These units have been adopted to be consistent with United States Nuclear Regulatory Commission LLRW uniform manifest requirements. Information for converting the data to cubic feet and curies is provided in footnotes throughout the report and the conversion tables in appendix A.

Low-level radioactive waste is one category of waste produced through processes using radioactive materials. In the U.S., radioactive wastes are classified according to a number of different categories by federal law and U.S. Nuclear Regulatory Commission (NRC) regulations.

Waste generated by certain federal installations and programs, such as the Brookhaven National Laboratory, the Knolls Atomic Power Laboratory, and West Valley Demonstration Project, are not included in this report nor in the requirements for generator reporting to NYSERDA. Under the federal Low-Level Radioactive Waste Policy Act, as amended in 1985 (Public Law 99-240), the federal government is responsible for disposal of LLRW owned and generated by the United States Department of Energy (DOE), the U.S. Navy, as a result of decommissioning vessels, and the federal government, as a result of research, development, testing, and production of nuclear weapons.

³ "Generator" is defined in 21 NYCRR Part 502.2(e) as "A person who by his actions within New York, or through the actions within New York of any agent, employee, or independent contractor, generates low-level radioactive waste."

⁴ New York Public Authorities Law. §1854-d(1) (McKinney's Consolidated Laws of New York, 2000).

Radioactivity is the measure of a material's propensity to emit radiation, or the number of radiation-emitting events occurring each second.

2 Low-Level Radioactive Waste Disposed by New York State Generators in 2022

This section summarizes data reported by LLRW generators in the State on waste transferred to 1 icensed LLRW disposal facilities in Clive, Utah (Energy Solutions); Richland, Washington (U.S. Ecology); and Andrews, Texas (Waste Control Specialists) during 2022. LLRW is categorized as Class A, B, or C. These categories were established originally by the U.S. Nuclear Regulatory Commission in Title 10 of the Code of Federal Regulations, Part 61, "Licensing Requirements for Land Disposal of Radioactive Waste" and have since been adopted by the New York State Department of Environmental Conservation in 6 NYCRR Part 382, "Regulations for Low-Level Radioactive Waste Disposal Facilities." Class A contains the lowest concentration of short- and long-lived radioactive materials and represents the largest class by volume produced in the State. On the other end of the spectrum, Class C waste contains the greatest concentration of long-lived radioactive material, and although normally the smallest in terms of volume generated, usually contains the greatest amount of radioactivity. Class B, as the name suggests, is an intermediate category.

The Clive facility can accept most Class A waste, but cannot accept Class B or C waste. The Clive facility can also accept, treat, and dispose of most solid, mixed waste (i.e., LLRW that also contains other hazardous constituents) that meets the site's radioactivity concentration limits. The Richland facility is authorized to accept limited volumes of LLRW containing small quantities of naturally occurring radioactive material (e.g., radium, uranium, and thorium) from State generators. The Andrews facility accepts Class A, B, and C waste.

In 2022, generators in the State reported disposing 4,551.3 cubic meters (160,706 cubic feet) of LLRW containing 30,280 GBq (818 curies) of radioactivity. About 28.1% of the volume, containing 9.2% of the radioactivity, was shipped to the Clive facility. The Andrews facility received about 71.9% of the volume, containing 90.8% of the radioactivity. The Richland facility received no LLRW from State generators this year.

In general, variability in volume and activity of LLRW disposed is primarily a function of refueling and maintenance activities at nuclear power plants. The high disposal volumes in 2015 and 2016 can be attributed to three separate disposal actions: decommissioning of a university research reactor, disposal of both irradiated hardware, and a large volume of resin from one of the nuclear power plants. The increase in disposal volume in 2022 can be attributed largely to decommissioning of a nuclear power plant site.

Individual entries in the following tables are rounded using standard practices as described. The totals shown represent the sum of the rounded entries; therefore, they may vary from one table to another and not always equal 100%. Waste volumes are rounded to the nearest tenth of a cubic meter. In most cases, radioactivity is rounded to the nearest 10,000th of a GBq. Percentages are rounded to the nearest tenth of a percent in tables and figures.

Table 1. Generators Reporting and Disposing Waste⁶

Generator Type	Number Reporting	Number Disposing
Medical		
Government	10	0
Private	116	8
College	16	8
Other	11	2
Total Medical Industrial	153	18
Manufacturing	6	4
Research and Development	3	0
Other	1	1
Total Industrial	10	5
Academic (nonmedical)		
College or University	20	8
Other	2	0
Total Academic Government (nonmedical)	22	8
New York State	1	1
Other	0	0
Total Government	1	1
Total Nonpower Plant	186	32
Nuclear Power Plant	6	6
Total	192	38

⁶ Disposal refers to generators that reported transferring any class of LLRW directly or via brokers or processors to one of the able licensed LLRW disposal facilities. LLRW generators that did not dispose of waste are either storing waste for future disposal or storing waste for decay

and subsequent disposal as nonradioactive waste. Section 3 addresses storage in detail.

Table 2. Volume and Radioactivity of Waste Disposed7

nerator Type	Volume ⁸ (m ³)	% of Total	Radioactivity ⁸ (GBq)	% of Total
Medical				
Government	4.3		9.0895	
Private	1.2		19.7702	
College	0.0		0.0000	
Other	0.5		0.0279	
Total Medical	5.9	0.1	28.8876	0.1
Industrial				
Manufacturing	21.4		167.7274	
Research and Development	0.0		0.0000	
Other	0.4		34.6559	
Total Industrial	21.8	0.5	202.3833	0.7
Academic (nonmedical)				
College or University	4.4		4.4332	
Other	0.0		0.0000	
Total Academic	4.4	0.1	4.4332	*
Government (nonmedical)				
New York State	1.0		0.3047	
Other	0.0		0.0000	
Total Government	1.0	*	0.3047	*
Total Nonpower Plant	33.1	0.7	236.0088	0.8
Nuclear Power Plant	4,518.2	99.3	30,044.1788	99.2
Total	4,551.3	100.0	30,280.1876	100.0
	(160,706 ft ³)		(818 curies)	

Refers to all classes of LLRW transferred either directly or via broker or processor to one of the available licensed LLRW disposal facilities.

To obtain volume in cubic feet (ft³), multiply the number of cubic meters (m³) by 35.31. To obtain radioactivity in curies, divide the number of gigabecquerels (GBq) by 37.

^{*} Less than 0.1% or 0.1 cubic meters.

Table 3. Waste Disposed9 by Class10 and Generator Type

	Cla	ass A	Cl	ass B	C	Class C
Generator Type	Volume ¹¹ (m ³)	Radioactivity ¹¹ (GBq)	Volume ¹¹ (m³)	Radioactivity ¹¹ (GBq)	Volume ¹¹ (m ³)	Radioactivity ¹¹ (GBq)
Medical	5.9	28.8876	0.0	0.0000	0.0	0.0000
Industrial	21.8	202.3833	0.0	0.0000	0.0	0.0000
Academic	4.3	4.4076	0.0	0.0000	0.1	0.0256
Government	1.0	0.3047	0.0	0.0000	0.0	0.0000
Nuclear Power Plant	4,494.5	3,427.5764	23.7	26,616.6024	0.0	0.0000
Total	4,527.5	3,663.5596	23.7	26,616.6024	0.1	0.0256
	(159,866 ft ³)	(99 curies)	(837 ft ³)	(719 curies)	(3.5 ft ³)	(* curies)

Refers to LLRW transferred either directly, via brokers, or processors to one of the available licensed LLRW disposal facilities.

Classes A, B, and C are waste-classification categories established by the U.S. Nuclear Regulatory Commission (NRC) in Title 10 of the Code of Federal Regulations, Part 61, "Licensing Requirements for Land Disposal of Radioactive Waste," and adopted by the New York State Department of Environmental Conservation in 6 NYCRR Part 382, "Regulations for Low-Level Radioactive Waste Disposal Facilities."

¹¹ To obtain volume in cubic feet (ft³), multiply the number of cubic meters (m³) by 35.31. To obtain radioactivity in curies, divide the number of gigabecquerels (GBq) by 37.

^{*} Less than 0.1 cubic meters, 0.0001 gigabecquerels, 0.1 curies, or 0.1%.

Table 4. Distribution of Waste Among Disposal Facilities¹²

Disposal Facility	Volume ¹³ (m³)	% of Total	Radioactivity ¹³ (GBq)	% of Total
Andrews, Texas	3,273.9	71.9	27,487.0888	90.8
Clive, Utah	1,277.4	28.1	2,793.0988	9.2
Richland, Washington	0.0	0.0	0.0000	0.0
Total	4,551.3	100.0	30,280.1876	100.0
	(160,706 ft ³)		(818 curies)	

¹² Refers to all classes of LLRW transferred either directly or via a broker or processor to the respective disposal facility.

To obtain volume in cubic feet (ft³), multiply the number of cubic meters (m³) by 35.31. To obtain radioactivity in curies, divide the number of gigabecquerels (GBq) by 37.

^{*} Less than 0.1% or 0.1 cubic meters.

Table 5. Waste Disposed by County of Origin

County	Number of Generators Reporting	Number of Generators Disposing LLRW ¹⁴	Volume ¹⁵ (m³)	% of Total	Radioactivity ¹⁵ (GBq)	% of Total
Albany	11	3	1.9	*	1.9591	*
Allegany	0	0	0.0	0.0	0.0000	0.0
Bronx	6	1	0.4	*	2.0068	*
Broome	3	0	0.0	0.0	0.0000	0.0
Cattaraugus	0	0	0.0	0.0	0.0000	0.0
Cayuga	0	0	0.0	0.0	0.0000	0.0
Chautauqua	0	0	0.0	0.0	0.0000	0.0
Chemung	2	1	0.4	*	0.0117	*
Chenango	1	0	0.0	0.0	0.0000	0.0
Clinton	1	0	0.0	0.0	0.0000	0.0
Columbia	0	0	0.0	0.0	0.0000	0.0
Cortland	1	0	0.0	0.0	0.0000	0.0
Delaware	1	0	0.0	0.0	0.0000	0.0
Dutchess	6	1	0.2	*	0.0234	*
Erie	17	5	21.4	0.5	169.1479	0.6
Essex	0	0	0.0	0.0	0.0000	0.0
Franklin	1	0	0.0	0.0	0.0000	0.0
Fulton	1	0	0.0	0.0	0.0000	0.0
Genesee	1	0	0.0	0.0	0.0000	0.0
Greene	0	0	0.0	0.0	0.0000	0.0
Hamilton	0	0	0.0	0.0	0.0000	0.0
Herkimer	0	0	0.0	0.0	0.0000	0.0
Jefferson	2	0	0.0	0.0	0.0000	0.0
Kings	6	1	*	*	4.7794	*
Lewis	0	0	0.0	0.0	0.0000	0.0
Livingston	2	0	0.0	0.0	0.0000	0.0
Madison	0	0	0.0	0.0	0.0000	0.0
Monroe	8	3	0.6	*	3.9871	*
Montgomery	1	0	0.0	0.0	0.0000	0.0
Nassau	20	2	0.1	*	0.1944	*
New York	19	5	4.4	0.1	11.4565	*
Niagara	1	0	0.0	0.0	0.0000	0.0
Oneida	1	0	0.0	0.0	0.0000	0.0
Onondaga	12	0	0.0	0.0	0.0000	0.0
-6		-				

Table 5 continued

County	Number of Generators Reporting	Number of Generators Disposing LLRW ¹⁴	Volume ¹⁵ (m³)	% of Total	Radioactivity ¹⁵ (GBq)	% of Total
Ontario	1	0	0.0	0.0	0.0000	0.0
Orange	6	0	0.0	0.0	0.0000	0.0
Orleans	0	0	0.0	0.0	0.0000	0.0
Oswego	4	3	1,137.2	25.0	14,895.5560	49.2
Otsego	0	0	0.0	0.0	0.0000	0.0
Putnam	1	0	0.0	0.0	0.0000	0.0
Queens	7	2	0.6	*	34.6924	0.1
Rensselaer	5	1	0.2	*	*	0.0
Richmond	1	0	0.0	0.0	0.0000	0.0
Rockland	2	1	*	*	0.2367	*
St. Lawrence	2	1	0.1	*	0.0004	*
Saratoga	3	0	0.0	0.0	0.0000	0.0
Schenectady	1	0	0.0	0.0	0.0000	0.0
Schoharie	0	0	0.0	0.0	0.0000	0.0
Schuyler	0	0	0.0	0.0	0.0000	0.0
Seneca	0	0	0.0	0.0	0.0000	0.0
Steuben	1	0	0.0	0.0	0.0000	0.0
Suffolk	13	1	0.1	*	5.7589	*
Sullivan	0	0	0.0	0.0	0.0000	0.0
Tioga	0	0	0.0	0.0	0.0000	0.0
Tompkins	4	2	0.7	*	0.2934	*
Ulster	0	0	0.0	0.0	0.0000	0.0
Warren	3	0	0.0	0.0	0.0000	0.0
Washington	0	0	0.0	0.0	0.0000	0.0
Wayne	2	1	116.6	2.6	92.6291	0.3
Westchester	12	4	3,266.4	71.7	15,057.4544	49.7
Wyoming	0	0	0.0	0.0	0.0000	0.0
Yates	0	0	0.0	0.0	0.0000	0.0
Totals	192	38	4,551.3		30,280.1876	
			(106,706 ft ³)		(818 curies)	

¹⁴ Refers to the number of generators that reported transferring all classes of LLRW, either directly or via a broker or processor, to one of the available licensed LLRW disposal facilities.

¹⁵ To obtain volume in cubic feet (ft³), multiply the number of cubic meters (m³) by 35.31. To obtain radioactivity in curies, divide the number of gigabecquerels (GBq) by 37.

^{*} Less than 0.1 cubic meter, 0.1%, or 0.0001 GBq.

Table 6. Radionuclide Content of Waste Disposed^{16,17} (MBq)

	4		4 4 8 8 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	256 1 1 2 24	2.2 E1 3.7 E0 3.8 E0 3.8 E0 3.8 E0 3.8 E0 3.8 E0 3.8 E0 4 8 1.1 E2 2.4 E3 4 8 1.1 E2 2.3 E1 8 1.1 E6 1.3 E7 8 24 25 E6 1 26 E1 8 1.1 E6 1 1 E6 1 E1 1 E1
	31,564.904 945.757 2.830 1105.789					
22.202 3.715 651.580	0.011	0.011 0.704 0.704 2,379.000 8,536.260 423.740	0.011 0.704 0.704 2,379.000 8,536.260 423.740 347.858 5,116.566 1.767	0.011 0.704 0.704 2,379.000 8,536.260 423.740 347.858 5,116.566 5,116.566 1.767 21.218 0.740 48.100 13.031	0.011 0.704 0.704 2,379.000 8,536.260 423.740 347.858 347.858 1.767 21.218 0.740 48.100 13.031 16.206 8,098.354 8,098.354	0.011 0.704 0.704 2,379.000 8,536.260 423.740 347.858 1.767 21.218 0.740 48.100 13.031 16.206 8,098.354 8,098.354 8,098.354
					34,666.520	34,666.520
140 000	0.001	0.001	0.001	0.001	0.001 0.001 0.001 0.001 0.001 151.219	0.001 0.001 0.001 0.001 0.001 151.219
1,207.261	0.007	0.007	0.007 13.971 0.266 0.025 2.290 4.262 1.790	0.007 13.971 0.026 0.025 2.290 4.262 1.790 37.074	0.007 13.971 13.971 0.025 2.290 4.262 1.790 37.074 2,428.288 2,428.288	0.007 13.971 13.971 0.025 2.290 4.262 1.790 37.074 0.724 0.020 22.200
32.0 y 3.0 E6 y 5.7 E3 v	461.0 d 284.6 d 3.0 E5 y 162.8 d 29.1 y	461.0 d 284.6 d 3.0 E5 y 162.8 d 29.1 y 29.1 y 77.3 d 77.3 d	284.6d 284.6d 3.0 E5 y 162.8 d 29.1 y 29.1 y 77.3 d 77.3 d 70.9 d 5.3 y 27.7 d 2.1 y 30.1 y	284.6d 284.6d 3.0 E5 y 162.8 d 29.1 y 29.1 y 77.3 d 77.3 d 77.3 d 271.8 d 5.3 y 2.1 y 30.1 y 13.5 y 2.7 y 44.5 d 68.0 m 241.6 d 270.8 d	284.6d 284.6d 3.0 E5 y 162.8 d 29.1 y 29.1 y 77.3 d 70.9 d 5.3 y 27.7 d 27.7 d 27.7 d 27.7 d 27.7 d 27.7 d 44.5 d 68.0 m 241.6 d 270.8 d 12.3 y 27.9 d 5.3 y 27.7 d 27.7 d 44.5 d 68.0 m 241.6 d 270.8 d 12.3 y 70.0 d	284.6d 284.6d 3.0 E5 y 162.8 d 29.1 y 29.1 y 77.3 d 70.9 d 5.3 y 27.7 d 27.7 d 27.7 d 27.7 d 27.7 d 27.7 d 27.8 d 13.5 y 27.7 d 27.7 d 27.7 d 27.7 d 27.7 d 27.7 d 27.8 d 13.5 y 27.7 d 27.7
$\perp \perp \perp$	$\frac{1}{1}$					Ce-144 Cl-36 Cm-243 Cm-244 Co-244 Co-56 Co-56 Co-56 Co-56 Co-60 Cr-51 Co-60 Cr-51 Cs-137 Eu-152 Fe-55 Fe-55 Fe-56 Ge-68 Ge-68 Ge-68 H-3 HF-175 L-129 K-40 Lu-177 Lu-177m

Radionuclide	Half-Life ¹⁸	Academic	Government	Industrial	Medical	Nuclear Power Plants	Total
Ni-63	101 y	25.900		167,362.500	16.280	11,236,135.571	1.1 E7
P-32	14.3 d				31.080		3.1 E1
Pa-234	6.7 h				0.005		5.0 E-3
Pb-210	22.3 y		0.001		0.009		9.5 E-3
Pd 103	17.0 d				0.370		3.7 E-1
Po-210	138.4 d		0.028	106.500	3.856		1.1 E2
Pm-147	2.6 y				0.001		1.0 E-3
Pu-238	87.7 y					85.099	8.6 E1
Pu-239	2.4 E4 y					18.212	1.8 E1
Pu-240	2.4 E4 y					1.497	1.5 E0
Pu-241	14.4 y					7,212.028	7.2 E3
Ra-226	1.6 E3 y	14.709			0.741		1.5 E1
S-35	87.2 d	638.700			52.355		6.9 E2
Sb-124	60.2 d					168.299	1.7 E2
Sb-125	2.8 y					461,729.713	4.6 E5
Sn-113	115.1 d					211.056	2.1 E2
Sr-89	50.5 d					5.779	5.8 E0
Sr-90	28.8 y	0.018	0.002		24.816	8,300.660	8.3 E3
Ta-182	114.4 d				406.000		4.1 E2
Tc-99m	6.0 h		0.001		3.419	325.086	3.3 E2
Te-123m	119.7 d					890.0	6.8 E-2
Th-230	7.5 E4y		0.001				1.0 E-3
Th-232	1.4 E10 y			23.390	0.005		2.3 E1
T1-201	3.0 d				0.370		3.7 E-1
U-233	1.6 E5 y			0.035			3.5 E-2
U-234	2.4 E5 y	0.001		11.289			1.1 E1
U-235	7.0 E8 y			0.365		0.747	1.1 E0
U-236	2.3 E7 y			0.046			4.6 E-2
U-238	4.5 E9 y	13.426	4.625	0.003	108.876	0.038	1.3 E2
Y-88	106.7 d				0.010		9.5 E-3
Zn-65	243.8 d				330.295	183,576.326	1.8 E5
Zr-95	64 d				25.789	580.651	6.1 E2
Others ¹⁹	-		-	-		-	
	Total	4.433.200	304.704	202.383.348	28.887.632	30 044 179 440	3 O E 7

Some generator facilities have reported radionuclides with half-lives of less than 90 days in LLRW disposed. In the majority of these cases, these radionuclides cannot be separated readily from longer-lived radionuclides in the waste. The sum of individual radionuclide radioactivities frequently will not match the overall radioactivity totals reported for waste disposed due to rounding and other approximation techniques. Every effort is made to identify and resolve significant discrepancies. 16

To obtain radioactivity in curies, divide the number of megabecquerels (MBq) by 37,000.

In certain cases, LLRW generators are permitted by manifest to report a single activity for a group of radionuclides without assigning a value to each; those data are reported here. Source: Chart of the Nuclides, General Electric Company under the direction of Naval Reactors, DOE; 16th edition, revised to 2002. NB: y=years, m=months, d=days, h=hours. 18

Table 7. Number of Facilities Disposing Various Waste Types²⁰

Waste Type ²¹	Medical	Industrial	Academic	Government	Nuclear Power Plants	Total
Activated Material	2	1	0	0	0	3
Aqueous Liquids	3	1	2	1	0	7
Animal Carcasses	1	0	0	0	0	1
Anion Exchange Media	0	0	0	0	0	0
Biological Material (except animal carcasses)	2	0	1	1	0	4
Cation Exchange Medias	0	0	0	0	1	1
Charcoal	0	0	0	0	1	1
Compacted Trash	6	3	3	1	2	15
Contaminated Equipment	1	1	1	0	1	4
Demolition Rubble	0	0	0	0	1	1
Evaporator Bottoms/ Sludges/Concentrates	0	1	0	0	0	1
Filter Media	0	1	0	0	2	3
Filter (Mechanical)	0	0	0	0	2	2
Glassware/Labware	2	0	1	0	0	3
Incinerator Ash	0	0	0	0	0	0
Material to be Incinerated	1	1	1	0	0	3
Mixed Bed Ion- Exchange Media	0	0	0	0	2	2
Non-Compacted Trash	1	1	1	0	2	5
Oil	0	0	0	0	2	2
Organic Liquids (excluding oil)	1	1	2	0	0	4
Paint or Plating	0	1	0	1	0	2
Sealed Source/Device	6	1	1	0	0	8
Soil	0	0	0	0	1	1
Other ²²	2	0	2	0	0	4

Refers to the number of generators that reported transferring any class of LLRW directly and via brokers and processors to one of the available licensed LLRW disposal facilities.

Waste types listed are as defined by the U.S. Nuclear Regulatory Commission (NRC) Uniform Manifest. Generators frequently report disposal of several types of waste.

²² In certain cases, generators reported disposing waste that did not fit into any of the categories listed. Those data are reported here.

3 Low-Level Radioactive Waste in Storage (as of December 31, 2022)

This section provides information on LLRW stored by generators.

Many generators store LLRW to allow its radioactivity to diminish to levels that permit disposal as nonradioactive waste (i.e., storage for decay). In general, the regulatory agencies with jurisdiction over LLRW in the State allow storage for decay only where the waste contains radionuclides with half-lives of less than 90 days. LLRW in storage for decay is normally held for 10 half-lives or until radioactivity has diminished to a level where it is indistinguishable from background radiation. Most generators hold LLRW in storage for decay at their own facilities, although approved off-site facilities may be used.

Generators also regularly store waste pending future transfer to a licensed LLRW disposal facility (i.e., storage pending disposal). Storage pending disposal can occur for extended periods, as when the Barnwell LLRW disposal facility in South Carolina no longer accepted waste from generators in New York State from June 30, 1994 to June 30, 1995. The Barnwell facility again closed to New York State as of July 1, 2008, increasing storage needs until the Andrews, Texas facility opened in 2012. Such storage may also occur when the LLRW has a particular characteristic that makes it unacceptable at the available disposal facilities (e.g., contains chemically hazardous components).

For those cases where access to licensed disposal facilities is not available, most generators will store LLRW at their own sites, although approved off-site storage facilities may be used. In addition, most generators routinely store LLRW at their facilities for short periods as a normal part of operation or staging while accumulating a sufficient quantity for transfer to a waste broker or a treatment or disposal facility. Post-storage treatment or processing may significantly reduce the volume of waste requiring final disposal.

Individual entries in the following tables are rounded using standard procedures as described. The totals shown represent the sum of the rounded entries; therefore, they may vary slightly from one table to another and not always equal 100%. Waste volumes are rounded to the nearest tenth of a cubic meter. In most cases, radioactivity is rounded to the nearest 10,000th of a GBq. Percentages are rounded to the nearest tenth of a percent in the tables and figures.

Table 8. Generators Reporting and Storing Waste Pending Disposal²³

Generator Type	Number Reporting	Number Storing
Medical		
Government	10	2
Private	116	7
College	16	2
Other	11	1
Total Medical	153	12
Industrial		
Manufacturing	6	2
Research and Development	3	2
Other	1	0
Total Industrial	10	4
Academic (nonmedical)		
College or University	20	10
Other	2	1
Total Academic	22	11
Government (nonmedical)		
New York State	1	0
Other	0	0
Total Government	1	0
Total Nonpower Plant	186	27
Nuclear Power Plant	6	1
Total	192	28

Includes any class of LLRW reported in storage at generator sites or an approved off-site location pending transfer to a licensed LLRW facility as of December 31, 2022. Does not include LLRW held in storage for decay.

Table 9. Volume and Radioactivity of Waste Stored Pending Disposal²⁴

Generator Type	Volume ²⁵ (m³)	% of Total	Radioactivity ²⁵ (GBq)	% of Total
Medical				
Government	0.9		0.3282	
Private	0.5		0.0644	
College	1.5		0.4606	
Other	0.5		0.0226	
Total Medical	3.4	14.9	0.8758	0.3
Industrial				
Manufacturing	2.3		1.2560	
Research and Development	2.1		1.0131	
Other	0.0		0.0000	
Total Industrial	4.4	19.2	2.2691	0.7
Academic (nonmedical)				
College or University	10.0		4.1828	
Other	0.1		0.0100	
Total Academic	10.1	44.1	4.1928	1.2
Government (nonmedical)				
New York State	0.0		0.0000	
Other	0.0		0.0000	
Total Government	0.0	0.0	0.0000	0.0
Total Nonpower Plant	17.9	78.2	7.3377	2.2
Nuclear Power Plant	5.0	21.8	328.7660	97.8
Total	22.9	100.0	336.1037	100.0
	(809 ft ³)		(9 curies)	

²⁴ Includes all classes of LLRW reported in storage at generator sites or an approved off-site location pending transfer to a licensed LLRW facility as of December 31, 2022. Does not include LLRW held in storage for decay.

²⁵ To obtain volume in cubic feet (ft³), multiply the number of cubic meters (m³) by 35.31. To obtain radioactivity in curies, divide the number of gigabecquerels (GBq) by 37.

^{*} Less than 0.1% or 0.1 cubic meters.

Table 10. Waste in Storage Pending Disposal by Class and Generator Type^{26, 27}

	C	lass A	C	Class B	C	Class C
Generator Type	Volume ²⁸ (m ³)	Radioactivity ²⁸ (GBq)	Volume ²⁸ (m ³)	Radioactivity ²⁸ (GBq)	Volume ²⁸ (m³)	Radioactivity ²⁸ (GBq)
Medical	3.4	0.8758	0.0	0.0000	0.0	0.0000
Industrial	3.4	2.0138	0.0	0.0000	1.0	0.2553
Academic	10.1	4.1928	0.0	0.0000	0.0	0.0000
Government	0.0	0.0000	0.0	0.0000	0.0	0.0000
Nuclear Power Plant	0.0	0.0000	5.0	328.7660	0.0	0.0000
Total	16.9	7.0824	5.0	328.7660	1.0	0.2553
	(597 ft ³)	(0.2 curies)	(176 ft ³)	(8.9 curies)	(35 ft³)	(0.0069 curies)

²⁶ Classes A, B, and C are waste-classification categories established by the U.S. Nuclear Regulatory Commission (NRC) in Title 10 of the Code of Federal Regulations, Part 61, "Licensing Requirements for Land Disposal of Radioactive Waste," and adopted by the New York State Department of Environmental Conservation in 6 NYCRR Part 382, "Regulations for Low-Level Radioactive Waste Disposal Facilities."

²⁷ Refers to LLRW in storage at generator sites or an approved off-site location pending transfer to a licensed LLRW facility as of December 31, 2022. Does not include LLRW held in storage for decay.

²⁸ To obtain volume in cubic feet (ft³), multiply the number of cubic meters (m³) by 35.31. To obtain radioactivity in curies, divide the number of gigabecquerels (GBq) by 37.

^{*} Less than 0.1% or 0.1 cubic meters.

Table 11. Number of Facilities Reporting Storage of Various Waste Types Pending Disposal

Waste Type ²⁹	Medical	Industrial	Academic	Government	Nuclear Power Plants	Total
Activated Material	1	0	0	0	0	1
Animal Carcasses	0	0	0	0	0	0
Anion Exchange Media	0	1	0	0	0	1
Aqueous Liquids	1	1	1	0	0	3
Biological Material (Except Animal Carcasses)	0	1	0	0	0	1
Cation Exchange Media	0	0	0	0	0	0
Contaminated Equipment	0	0	0	0	0	0
Compacted Trash	5	1	2	0	0	8
Demolition Rubble	0	0	0	0	0	0
Evaporator Bottoms/Sludge	0	0	0	0	0	0
Filter Media	1	0	0	0	0	1
Filter Media (Mechanical)	0	0	0	0	0	0
Glassware/Labware	2	0	1	0	0	3
Incinerator Ash	0	0	0	0	0	0
Material that will be Incinerated	1	0	1	0	0	2
Mixed Bed Ion-Exchange Media	0	0	0	0	1	1
Non-Compactible Trash	1	1	1	0	0	3
Organic Liquids (excluding oil)	1	0	1	0	0	2
Paint or Plating	0	0	0	0	0	0
Sealed Source/Device	0	1	1	0	0	2
Soil	0	0	0	0	0	0
Other ³⁰	0	1	0	0	0	1

²⁹ Waste types listed are as defined by the U.S. Nuclear Regulatory Commission (NRC) Uniform Manifest. Generators frequently report storage of several types of waste.

³⁰ In certain cases, generators reported storage of waste that did not fit into any of the categories listed. Those data are reported here.

Table 12. Waste in Storage³¹ Pending Disposal by County of Origin

County	Number of Generators Reporting	Number of Generators Storing LLRW ³²	Volume ³³ (m ³)	% of Total	Radioactivity ³³ (GBq)	% of Total
Albany	11	3	0.2	0.9	0.0340	*
Allegany	0	0	0.0	0.0	0.0000	0.0
Bronx	6	2	0.7	3.1	0.0286	*
Broome	3	0	0.0	0.0	0.0000	0.0
Cattaraugus	0	0	0.0	0.0	0.0000	0.0
Cayuga	0	0	0.0	0.0	0.0000	0.0
Chautauqua	0	0	0.0	0.0	0.0000	0.0
Chemung	2	0	0.0	0.0	0.0000	0.0
Chenango	1	0	0.0	0.0	0.0000	0.0
Clinton	1	0	0.0	0.0	0.0000	0.0
Columbia	0	0	0.0	0.0	0.0000	0.0
Cortland	1	0	0.0	0.0	0.0000	0.0
Delaware	1	0	0.0	0.0	0.0000	0.0
Dutchess	6	0	0.0	0.0	0.0000	0.0
Erie	17	4	0.8	3.5	1.1318	0.3
Essex	0	0	0.0	0.0	0.0000	0.0
Franklin	1	1	0.1	0.4	0.0100	*
Fulton	1	0	0.0	0.0	0.0000	0.0
Genesee	1	0	0.0	0.0	0.0000	0.0
Greene	0	0	0.0	0.0	0.0000	0.0
Hamilton	0	0	0.0	0.0	0.0000	0.0
Herkimer	0	0	0.0	0.0	0.0000	0.0
Jefferson	2	0	0.0	0.0	0.0000	0.0
Kings	6	0	0.0	0.0	0.0000	0.0
Lewis	0	0	0.0	0.0	0.0000	0.0
Livingston	2	1	0.2	0.9	0.0007	*
Madison	0	0	0.0	0.0	0.0000	0.0
Monroe	8	2	1.6	6.9	1.2757	0.4
Montgomery	1	0	0.0	0.0	0.0000	0.0
Nassau	20	0	0.0	0.0	0.0000	0.0
New York	19	6	10.8	47.2	0.7887	0.2
Niagara	1	1	0.8	3.5	0.0026	*
Oneida	1	0	0.0	0.0	0.0000	0.0
Onondaga	12	1	0.1	0.4	0.0003	*
Ontario	1	0	0.0	0.0	0.0000	0.0

Table 12 continued

County	Number of Generators Reporting	Number of Generators Storing LLRW ³²	Volume ³³ (m ³)	% of Total	Radioactivity ³³ (GBq)	% of Total
Orange	6	0	0.0	0.0	0.0000	0.0
Orleans	0	0	0.0	0.0	0.0000	0.0
Oswego	4	1	5.0	21.8	328.7660	97.8
Otsego	0	0	0.0	0.0	0.0000	0.0
Putnam	1	0	0.0	0.0	0.0000	0.0
Queens	7	1	1.3	5.7	1.6612	0.5
Rensselaer	5	1	0.8	3.5	2.3409	0.7
Richmond	1	0	0.0	0.0	0.0000	0.0
Rockland	2	1	*	*	0.0370	*
St. Lawrence	2	1	*	*	0.0000	*
Saratoga	3	0	0.0	0.0	0.0000	0.0
Schenectady	1	0	0.0	0.0	0.0000	0.0
Schoharie	0	0	0.0	0.0	0.0000	0.0
Schuyler	0	0	0.0	0.0	0.0000	0.0
Seneca	0	0	0.0	0.0	0.0000	0.0
Steuben	1	0	0.0	0.0	0.0000	0.0
Suffolk	13	0	0.0	0.0	0.0000	0.0
Sullivan	0	0	0.0	0.0	0.0000	0.0
Tioga	0	0	0.0	0.0	0.0000	0.0
Tompkins	4	1	0.5	2.2	0.0226	*
Ulster	0	0	0.0	0.0	0.0000	0.0
Warren	3	0	0.0	0.0	0.0000	0.0
Washington	0	0	0.0	0.0	0.0000	0.0
Wayne	2	0	0.0	0.0	0.0000	0.0
Westchester	12	1	*	*	0.0016	*
Wyoming	0	0	0.0	0.0	0.0000	0.0
Yates	0	0	0.0	0.0	0.0000	0.0
Totals	192	28	22.9 (809 ft ³)		336.1037 (9 curies)	

³¹ Includes LLRW in storage at generator sites or an approved off-site location pending transfer to a licensed LLRW facility, as of December 31, 2022. Does not include LLRW held in storage for decay.

³² Refers to the number of generators that reported LLRW in storage pending disposal as of December 31, 2022.

To obtain volume in cubic feet (ft³), multiply the number of cubic meters (m³) by 35.31. To obtain radioactivity in curies, divide the number of gigabecquerels (GBq) by 37.

 $^{^{\}ast}$ Less than 0.1 cubic meter, or 0.1%, or 0.0001 GBq.

Table 13. Radionuclide Content of Waste³⁴ in Storage Pending Disposal³⁵ (MBq)

ı
0.106
0.037
537.743
0.001
0.004
3.986
2,149.699

Table 13 continued

Radionuclide	Half-Life ³⁶	Academic	Government	Industrial	Medical	Nuclear Power Plants	Total
Mn-52	5.6 d				0.250		2.5 E-1
Mn-54	312.1 d	1.650		37.700	51.001	0.352	9.1 E1
Na-22	2.6 y	15.334		0.190			1.6 E1
NP-95	35 d			1.177			1.2 E0
Ni-63	101 y	1,460.470		740.000		83,620.000	8.4 E4
Pu-238	87.7 y					4.070	4.1 E0
Pu-239	2.4 E4 y					1.528	1.5 E0
Ra-223	11.4 d				237.000		2.4 E1
Ra-226	1.6 E3 y			2.600			2.6 E0
Re-184	165 d			388.500			4.0 E2
Sr-90	28.8 y				0.001	5,883.000	5.9 E3
Ta-182	114.4 d			1.515	7.000		8.5 E0
Tc-99m	6.0 h	14.800					1.5 E-1
Th-232	1.4 E10 y	0.181					1.8 E-1
U-238	4.5 E9 y	9.015					9.0 E0
Zn-65	243.8 d			1.195	38.000	0.004	3.9 E1
Others ³⁷							
	Total	4,192.845	0.000	2,269.052	875.839	328,765.969	3.4 E5

Some generator facilities have reported radionuclides with half-lives of less than 90 days in LLRW stored. In the majority of these cases, the shorter-lived radionuclides reported cannot be separated readily from longer-lived radionuclides in the waste. The sum of individual radionuclide radioactivities will frequently not match the overall radioactivity totals reported for waste stored due to rounding and other approximation techniques. Every effort is made to identify and resolve significant discrepancies with the affected generators.

To obtain radioactivity in curies, divide the number of megabecquerels (MBq) by 37,000.

Source: Chart of the Nuclides, General Electric Company under the direction of Naval Reactors, U.S. DOE; 16th edition, revised to 2002. NB: y=years, m=months, d=days, h=hours. 36

In certain cases, LLRW generators are permitted by manifest to report a single activity for a group of radionuclides without assigning a value to each; those data are reported here.

Table 14. Waste Reported in Storage for Decay³⁸ by Generator Type

Generator Type	Number of Generators Reporting	Number of Generators Reporting Storage for Decay ³⁹	Number of Generators Reporting Only Storage for Decay	Estimated Maximum Volume in Storage for Decay at Any Time ⁴⁰ (m³)
Medical	153	151	123	1,027
Industrial	10	3	0	6
Academic	22	15	4	241
Government	1	1	0	3
Nuclear Power Plant	6	0	0	0
Total	192	170	127	1,277 (45,091 ft ³)

Storage for decay means holding the LLRW until the level of radioactivity has diminished to the point where it can be disposed of as nonradioactive waste. Normally, such LLRW is held for 10 half-lives, or until the radioactivity is at a level that is undetectable above background radiation. Typical radionuclides held for decay, with their respective half-lives, include Iodine-123 (13.1 hours), Iodine-125 (59.4 days), Iodine-131 (8.0 days), Technetium-99m (6.0 hours), Phosphorous-32 (14.3 days), Gallium-67 (3.3 days), and Sulfur-35 (87.2 days).

³⁹ Some generators that store for decay also may have transferred other LLRW to one of the licensed LLRW disposal facilities or may be storing LLRW pending disposal.

⁴⁰ To obtain volume in cubic feet (ft³), multiply the number of cubic meters (m³) by 35.31.

4 Historic Data and Projections for Low-Level Radioactive Waste Generation in New York State

This section provides historic data on the volume and radioactivity of LLRW shipped for disposal, based on generator data reported to NYSERDA for years 2013 through 2022.

This section also provides a summary, based on information supplied in the 2022 generator reports, of generator projections of the volume and radioactivity of LLRW that require disposal in a licensed LLRW facility for the years 2023 through 2027.

Volume projections are rounded to the nearest tenth of a cubic meter, and radioactivity projections to the nearest gigabecquerels (GBq).

Table 15. Historic Overview of Waste Disposal by Volume^{41, 42} (in m³)


Generator Type	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022
Nonpower Plant	46	40	380	79	15	20	51	22	321	33
Nuclear Power Plant	1,420	818	1,464	2,487	1,065	1,353	898	870	2,518	4,518
Total	1,466	828	1,844	2,566	1,080	1,373	919	892	2,839	4,551
			i	: (


Table 16 Historic overview of Waste Disposal by Badioactivity^{41,42} (in GBd)

lable 10. mistoric overview of wa	Storic over	view of v	vaste Disposal by Radioactivity(in GDQ)	al by had	loactivity	(bas ui)				
Generator Type	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022
Nonpower Plant	33	524	41	126	34	974	315	200	122	236
Nuclear Power Plant	128,112	15,533	1,066,628	20,432	75,602	210,454	81,602	8,846	7,228	30,044
Total	128,145	16,057	1,066,669	20,558	75,636	211,428	81,917	9,046	7,350	30,280

⁴¹ Data are based on reports that must be filed annually with NYSERDA.

To obtain volume in cubic feet, multiply the number of cubic meters by 35.31. To obtain radioactivity in curies, divide the number of gigabecquerels (GBq) by 37.

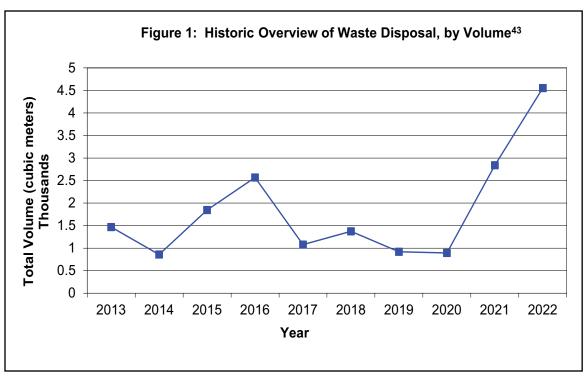

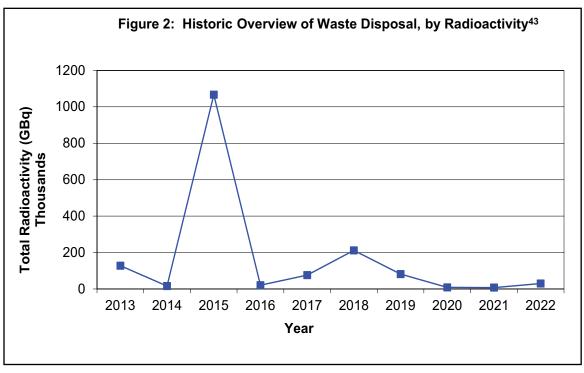

⁴³ In general, the radioactive content of the LLRW disposed continues to be a function of refueling and maintenance activities at New York State's six nuclear power plants, and shows little or no correlation to overall volume. The increase in disposal in 2015 and 2016 can be attributed to three separate disposal actions: decommissioning of a university research reactor, disposal of both irradiated hardware and a large volume of resin from one of the nuclear power plants. The increase in disposal volume in 2021 can be largely attributed to decomissioning of a nuclear power plant site.

Table 17. Generators' Five-Year Projections of Waste by Volume (m³)44,45

Generator Type	2023	2024	2025	2026	2027
Medical	6.99	24.8	25.0	23.8	24.2
Industrial	19.1	20.3	17.0	18.3	16.8
Academic	30.1	30.1	20.1	20.1	20.1
Government	0.2	0.2	0.2	0.2	0.2
Total Nonpower Plant	116.3	75.4	62.3	62.4	61.3
Nuclear Power Plant	2,490.0	2,400.0	2,400.0	2,400.0	2,400.0
Total	2,606.3	2,475.4	2,462.3	2,462.4	2,461.3

lable 10. delletatols 11Ve-lear Flojections of Waste - by hadroactivity (dbd/)	ical riojections of	vasic by i	שווטמטוועה	(dap)	
Generator Type	2023	2024	2025	2026	2027
Medical	31.9	31.9	38.7	21.9	12.9
Industrial	202.1	202.6	200.4	201.5	200.2
Academic	4.4	4.4	1.9	1.9	1.9
Government	0.2	0.2	0.2	0.2	0.2
Total Nonpower Plant	238.6	239.1	241.2	225.5	215.2
Nuclear Power Plant	20,850.0	20,850.0	20,850.0	20,850.0	20,850.0
Total	21,088.6	21,089.1	21,091.2	21,075.5	21,065.2

⁴⁴ Refers to all classes of LLRW projected by generators to require disposal in a licensed LLRW facility.

To obtain volume in cubic feet (ft³), multiply the number of cubic meters (m³) by 35.31. To obtain radioactivity in curies, divide the number of gigabecquerels (GBq) by 37.

Appendix A: Conversions for Units

The metric system is the standard set of measurement units used in science and technology today. Metric or SI system (Systeme International d'Unites) units have been incorporated into the U.S. Nuclear Regulatory Commission's Uniform Waste Manifest.

Volume is presented in cubic meters and radioactivity is presented in gigabecquerels (GBq) and megabecquerels (MBq). These units have been adopted for this report to be consistent with the uniform national LLRW manifest requirements. Some conversions for SI units to the previously used units of cubic feet and curies are provided in the following tables.

		Conversions for Un	its	
Measurement	SI Unit	Previously Used Unit	Value of Conventional Unit in SI Units	Conversional Factors
Radioactivity	Gigabecquerel (GBq) Megabecquerel (MBq)	Curie (Ci) milliCurie (mCi)	1 Ci = 37 GBq 1 Ci = 37,000 MBq	Ci × 37 = GBq Ci × 37,000 = MBq GBq / 37 = Ci MBq / 37,000 = Ci
Volume	cubic meters (m³)	cubic feet (ft³)	1 ft ³ = 0.028 m ³	$ft^3 \times 0.028 = m^3$ $m^3 \times 35.31 = ft^3$

Radioactivity Conversions					
mСi	MBq	GBq			
500	18,500	18.500			
200	7,400	7.400			
100	3,700	3.700			
50	1,850	1.850			
20	740	0.740			
10	370	0.370			
5	185	0.185			
2	74	0.074			
1	37	0.037			

Volume Conversions			
ft³	m³		
11.9 (89 gallon drum)	0.33		
11.1 (83 gallon drum)	0.31		
7.5 (55 gallon drum)	0.21		
4.01 (30 gallon drum)	0.11		
0.67 (5 gallon pail)	0.019		

NYSERDA, a public benefit corporation, offers objective information and analysis, innovative programs, Technical expertise, and support to help New Yorkers increase energy efficiency, save money, use renewable energy, and reduce reliance on fossil fuels. NYSERDA professionals work to protect the environment and create clean-energy jobs. NYSERDA has been developing partnerships to advance innovative energy solutions in New York State since 1975.

To learn more about NYSERDA's programs and funding opportunities, visit nyserda.ny.gov or follow us on Twitter, Facebook, YouTube, or Instagram.

New York State Energy Research and Development Authority

17 Columbia Circle Albany, NY 12203-6399 **toll free:** 866-NYSERDA **local:** 518-862-1090 **fax:** 518-862-1091

info@nyserda.ny.gov nyserda.ny.gov



State of New York

Kathy Hochul, Governor

New York State Energy Research and Development Authority

Richard L. Kauffman, Chair | Doreen M. Harris, President and CEO